


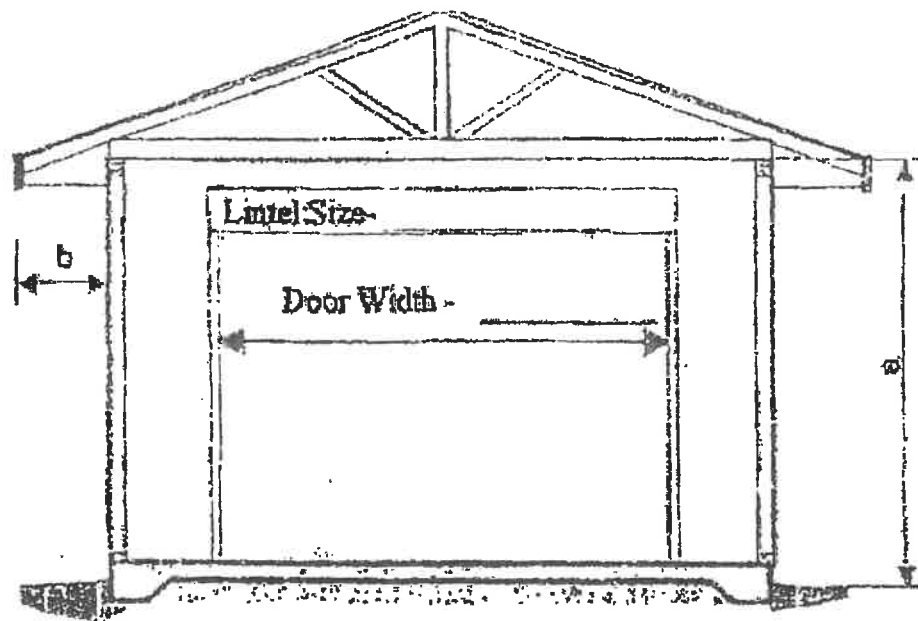

Reg Churko

306-728-7692 (Cell)

Email: reg@rcinspections.ca

Online: www.rcinspections.ca

Roof:

Type of roof shingles _____

Type & thickness of roof sheathing _____

Spacing of roof trusses _____

Slope of roof _____

Width of overhang _____

Exterior Wall:

Type of siding _____

Type & thickness of wall sheathing _____

Size and spacing of studs _____

Height of wall _____

Type, size and spacing of anchor bolts _____

Slab:

Thickness of slab _____


Type of sub base _____

Foundation:

Footings ☐

Slab on grade with thickened edge ☐

SITE PLAN (see left)

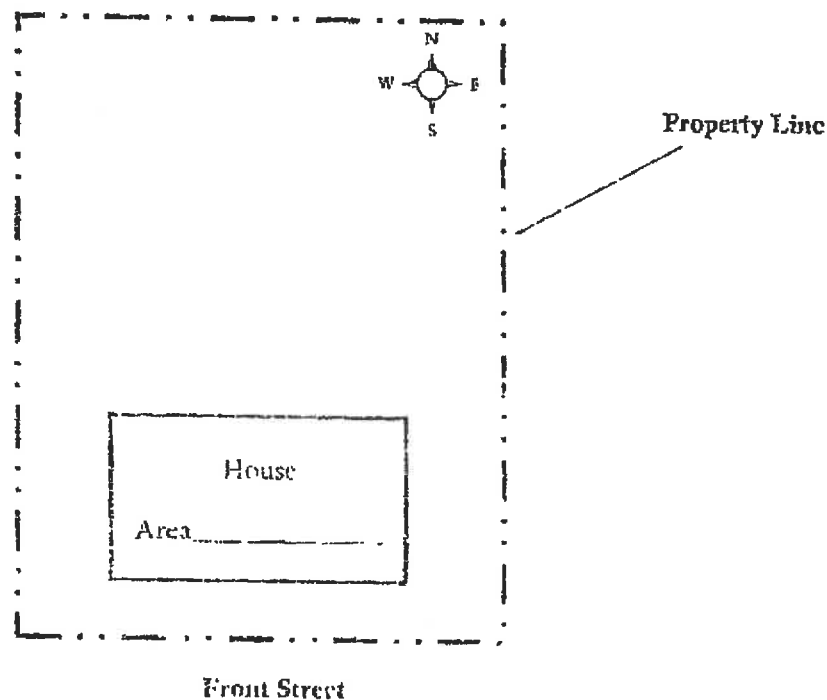

Show size and location of proposed garage ☐

Show distance to side property line ☐

Show distance to rear property line ☐

Show distance to house ☐


Show lot dimensions and shape of lot ☐

Show all existing buildings ☐



Box 967
Melville, Sask.
SOA 2P0
Phone 306-728-7692
Fax 306-728-4599

reg@rcinspections.ca website www.rcinspections.ca

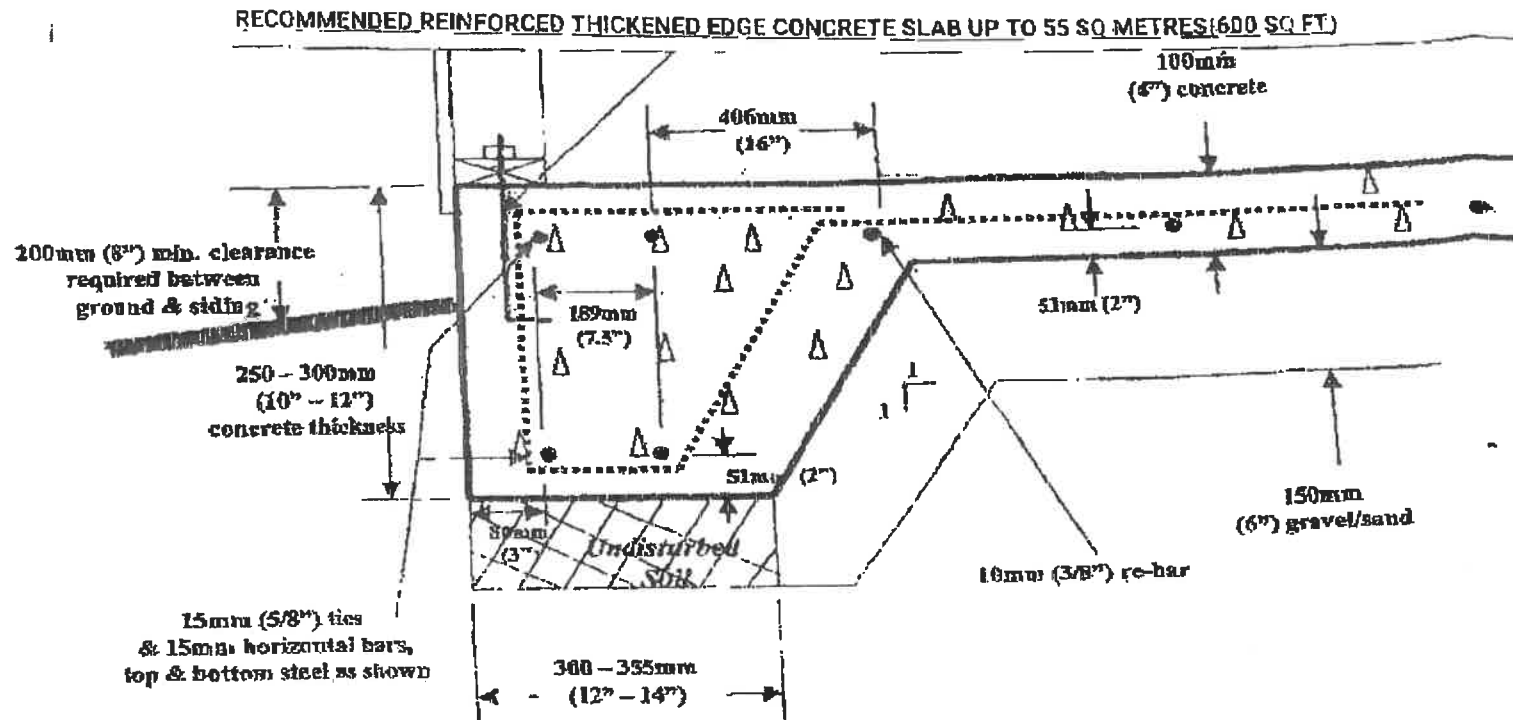

- Notes:
- 102mm (4") thick reinforced concrete slab with 10mm (3/8") dia re-bar at 406mm (16") on center each placed on:
 - 6 mil poly cover and (as per CGS B51.34M)
 - 152mm (6") deep compacted gravel base.
 - Around the perimeter place 12.7, (1/2") x 203mm (8") anchor bolts or equivalent at 900mm (36" to 48") spacing



Box 967
 Melville, Sask.
 S0A 2P0
 Phone 306-728-7692
 Fax 306-728-4599

reg@rcinspections.ca website www.rcinspections.ca

RECOMMENDED REINFORCED THICKENED EDGE CONCRETE SLAB OVER 55 SQ METRES (600) SQ FT

DETACHED GARAGES NOT MORE THAN 32'-10" WIDE

